




Tested. Trusted. Technical.

T3 Innovation is a leader in RJ45 connectors and cabling solutions. With extensive expertise and a genuine passion for our craft, we deliver products that truly perform. Our quality and performance are supported by robust evidence, ensuring reliability in every installation.

CATALOG

2 0 2 6

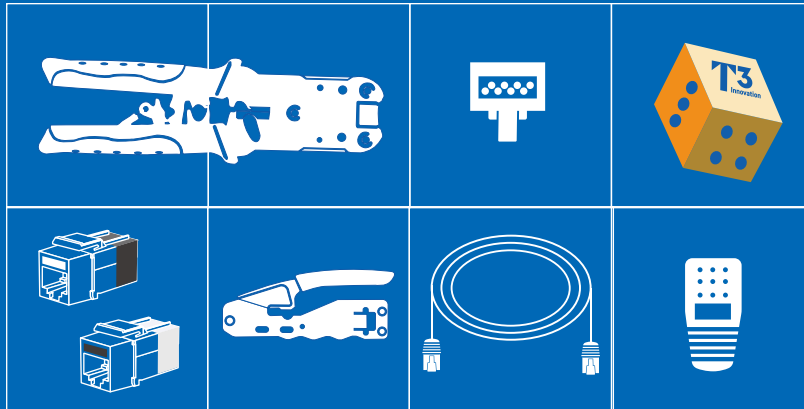

 FLUKE device Tested

  RoHS 

www.t3inno.com

© 2026 T3 Innovation. All rights reserved.

Hand Tool


SNAP PLUG™
TOOL

P/N : T10710-EX

Professional Heavy Duty Crimper

For RJ45 Modular Plugs

- Crimp both Shielded & Unshielded RJ45 plugs
- Crimp and Trim in one motion
- Built-in cable cutter and stripper

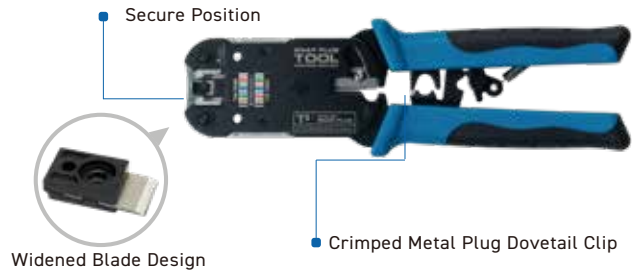

SNAP PLUG™
TOOL

P/N : T10610 / T10610-10P

Professional Compact Crimp Tool

For RJ45 Modular Plugs

- Crimp both Shielded & Unshielded RJ45 plugs
- Crimp and Trim in one motion
- Built-in lock keeps tool closed when not in use



TOOL

Keystone Jack Termination Tool

For Keystone Jack

- Terminates and cuts all 8 conductors at a time
- Dramatically reduce termination time
- Simple, one handed operation

Snap-Term



P/N : T50310

Notes : Compatible with T3 90D Keystone Jack



SNAP PLUG™

P/N : TPSR-B60-100AP / TPSR-B73-100AP

Strain Relief/ Snagless Boot

for SNAP PLUG Cat6a/Cat6/Cat5e plugs

B60

B73

Max LAN Cable OD
6.0 mm

Max LAN Cable OD
7.3mm

Shielded

Unshielded



SNAP LOCK™

Optional : Compatible with locking pin



SNAP PLUG™

P/N : SPC5-UTP-S100J-SR55

P/N : SPC6-UTP-S100J-SR65

P/N : SPC6-UTP-M100J-SR73

RJ45 Connectors/Boots /Copper Strips*

Combo Jar

P/N : SP-STP-S50J-SR65
P/N : SP-STP-M50J-SR73
P/N : SP-STP-135X30J-SR85



UTP



RJ45 Connector(UTP)

NON-PASS THROUGH

P/N : MPC5-UTP-100AP

Cat5e UTP

Standard RJ45 Modular Plug

STRAIGHT LINE




Max LAN Cable OD
6.0 mm

CONDUCTOR ID
MAX1.05 mm

 24 AWG SOLID OR STRANDED

 Unshielded

NON-PASS THROUGH

P/N : MPC6-UTP-50AP / MPC6-UTP-100AP

Cat6A/6 UTP


Standard RJ45 Modular Plug

HI/LO STAGGER




Max LAN Cable OD
7.0 mm

CONDUCTOR ID
MAX1.15 mm

 23 AWG SOLID OR STRANDED

 Unshielded

SNAP PLUG™

P/N : SPC5-UTP-S100AP

Cat5e UTP

Pass Through RJ45 Modular Plug

STRAIGHT LINE




Max LAN Cable OD
6.0 mm

CONDUCTOR ID
0.95 - 1.05 mm

 24 AWG SOLID OR STRANDED

 Unshielded

SNAP PLUG™

P/N : SPC6-UTP-S100AP

Cat6 UTP

Pass Through RJ45 Modular Plug

STRAIGHT LINE




Max LAN Cable OD
7.0 mm

CONDUCTOR ID
0.95 - 1.05 mm

 23 AWG SOLID OR STRANDED

 Unshielded

SNAP PLUG™

P/N : SPC6-UTP-M50AP / SPC6-UTP-M100AP

Cat6A/6 UTP

Pass Through RJ45 Modular Plug

HI/LO STAGGER




Max LAN Cable OD
7.0 mm

CONDUCTOR ID
1.10 - 1.15 mm

 23 AWG SOLID OR STRANDED

 Unshielded

RJ45 Connector (STP)

SNAP PLUG™

P/N : SP-STP-S50AP / SP-STP-S100AP

Cat5e STP

Pass Through RJ45 Modular Plug

STRAIGHT LINE



Internal Ground



Max LAN Cable OD
6.5 mm

CONDUCTOR ID
0.95 - 1.05 mm

23 AWG SOLID OR STRANDED

Shielded

SNAP PLUG™

P/N : SP-STP-M50AP / SP-STP-M100AP

Cat6A/6 STP

Pass Through RJ45 Modular Plug

HI/LO STAGGER



Internal Ground



Max LAN Cable OD
7.0 mm

CONDUCTOR ID
1.1 - 1.15 mm

23 AWG SOLID OR STRANDED

Shielded

SNAP PLUG™

P/N : SP-STP-L50AP / SP-STP-L100AP

Cat6A STP

Pass Through RJ45 Modular Plug

HI/LO STAGGER



Internal Ground



Max LAN Cable OD
7.0 mm

CONDUCTOR ID
MAX 1.2 mm

23 AWG SOLID OR STRANDED

Shielded

SNAP PLUG™

P/N : SP-STP-12X-50AP / SP-STP-12X-100AP

Cat6A/6 STP

Pass Through RJ45 Modular Plug

HI/LO STAGGER



External Ground



Max LAN Cable OD
8.5 mm

CONDUCTOR ID
1.15 - 1.2 mm

23 AWG SOLID OR STRANDED

Shielded

SNAP PLUG™

P/N : SP-STP-135X-50AP / SP-STP-135X-100AP

Cat6A XL STP

Pass Through RJ45 Modular Plug

HI/LO STAGGER



External Ground

Large Conductor



Max LAN Cable OD
8.5 mm

CONDUCTOR ID
1.35mm/0.053"

22 AWG SOLID OR STRANDED

Shielded

Lan Cable

Ultra Slim 28AWG

Cat6 U/UTP Stranded Patch cord with Locking Pin

- TIA Category : Cat6 (Compatible with Cat5e)
- Supported Data Rate \geq 1 Gbps (Gigabit ethernet)
- Supported Bandwidth \geq 250MHz



Blue / Grey Options

15cm	20cm	30cm	50cm
1M	2M	3M	5M



P/N : Cat6-28UTP-LPCORD-_BL/WT/**M

Ultra Slim 28AWG

Cat6A U/UTP Stranded Patch cord with Locking Pin

- TIA Category : Cat6A (Compatible with Cat6 / Cat5e)
- Supported Data Rate \geq 10 Gbps (Gigabit ethernet)
- Supported Bandwidth \geq 500 MHz



Blue / Grey Options

15cm	20cm	30cm	50cm
1M	2M	3M	5M



P/N : Cat6A-28UTP-LPCORD-_BL/WT/**M

Ultra Slim 28AWG

Cat6 F/UTP Stranded Patch cord with Locking Pin

- TIA Category : Cat6 (Compatible with Cat6 / Cat5e)
- Supported Data Rate \geq 1 Gbps (Gigabit ethernet)
- Supported Bandwidth \geq 250MHz



Blue / Grey Options

20cm	30cm	50cm	
1M	2M	3M	5M



P/N : Cat6-28SH-LPCORD-_BL/WT/**M

Ultra Slim 28AWG

Cat6A U/FTP Stranded Patch cord with Locking Pin

- TIA Category : Cat6A (Compatible with Cat6 / Cat5e)
- Supported Data Rate \geq 10 Gbps (Gigabit ethernet)
- Supported Bandwidth \geq 500 MHz



Blue / Grey Options

20cm	30cm	50cm	
1M	2M	3M	5M



P/N : Cat6A-28SH-LPCORD-_BL/WT/**M

Cat6 & Cat6A U/UTP 23AWG bulk cable

305M, PVC, CM Rated, UL, ETL, ROHS



RoHS ETL TAA

MADE IN TAIWAN

UNSHIELDED



Cat6

Cat6A



P/N : C6-23UTP-CM***-305M



Keystone Jack

Inline Coupler Keystone Jack

- ISO/IEC 11801, ANSI-TIA/EIA-568.2-D
- ETL Verified / FORCE POE Verified / UL Listed
- Support 30-90M Fluke Link Test
- Compact size for high density application
- Compatible with most unloaded patch panel and wall plate

P/N : CPLRKJ-C6UTP-BK-1AP
P/N : CPLRKJ-C6UTP-WH-1AP

UTP-Cat6 / 5e



P/N : CPLRKJ-C6STP-1AP
P/N : CPLRKJ-C6ASTP-1AP

STP-Cat6

STP-Cat6A




180° Keystone Jack Component Rated

- Built-in Dust cover (Spring loaded)
- 5 color ID bars included with each Keystone Jack
- Component Rated, Connecting Hardware standard Cat6 / 5e
- ISO/IEC 11801, ANSI-TIA/EIA-568.2-D
- Support 4PPoE, PoE++ Verified
- Available in Cat6A / Cat6 / Cat5e UTP




180° Toolless Keystone Jack Component Rated

- 5 color ID bars included with each Keystone Jack
- Component Rated, Connecting Hardware standard Cat6 / 5e
- ISO/IEC 11801, ANSI-TIA/EIA-568.2-D
- Support 4PPoE, PoE++ Verified
- Available in Cat6A / Cat6 / Cat5e UTP and STP

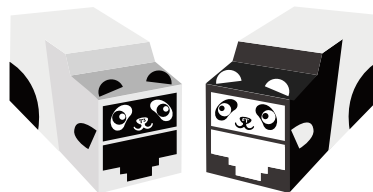

P/N : TLKJ-C6AUTP-5CBK-1AP
P/N : TLKJ-C6AUTP-5CWH-1AP
P/N : TLKJ-C6ASTP-5C-1AP

Cable Tie



UTP

STP



Strain Relief/Boots

SHORT BODY

LONG BODY

SNAGLESS

- Available in multiple configurations—including ultra-short body, long body, and snagless designs—our boots are built for versatility
- We also offer optional color clips to enhance and streamline your color management system



Snap-ring



HDMI Keystone Jack

- Available in 90° or 180°
- HDMI female to female adapter, H.D. version
- Support HDMI 2.0 or HDMI 2.1 with total cabling length <5M

90°



180°



Patch Panel

CE RoHS

8 PORT UTP KEYSTONE PATCH PANEL

COMPACT SIZE

UNSHIELDED

UNLOADED



Compatible Screw Included

P/N : PNL-UTP-UN8P-COMPACT



DATASHEET



CE RoHS

12 PORT KEYSTONE PATCH PANEL

ROTATABLE MODULE

UNSHIELDED

UNLOADED



Label Stickers

P/N : PNL-UTP-UN12P-ANGL



DATASHEET



CE RoHS

24 PORT UTP KEYSTONE PATCH PANEL

STAGGERED

10G NETWORKS

UNSHIELDED

UNLOADED

P/N : PNL-UTP-UN24P-1U-STAGGER



DATASHEET



CE RoHS


24 PORT KEYSTONE PATCH PANEL

SHIELDED

UNLOADED

GRAY

P/N : PNL-SH-UN24P-1U
P/N : PNL-SH-UN24P-1U-GRAY

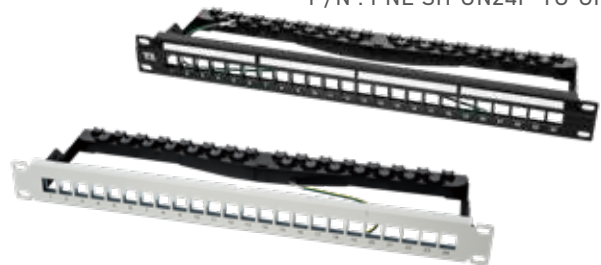

DATASHEET



CE RoHS


24 PORT UTP KEYSTONE PATCH PANEL

FRONT LOAD

UNSHIELDED

UNLOADED

P/N : PNL-UTP-UN24P-1U-FRONT

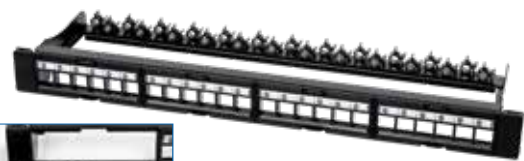

DATASHEET



CE RoHS

24 PORT CAT6 UTP PATCH PANEL

UNSHIELDED

LOADED

P/N : PNL-UTP-C624P-1U



DATASHEET



Cable Management

CE RoHS

Keystone Insert block



CABLE FEED THROUGH



BLANK COVER



DATASHEET



CE RoHS

Cable Management Rail-1U-24Slot

1U



P/N : PNL-MANAGER-1U-24SLOT

DATASHEET



CE RoHS

Cable Management Brush/Blank

BRUSH

BLANK



P/N : PNL-MANAGER-1U-BRUSH

P/N : PNL-MANAGER-1U-BLANK

DATASHEET



CE RoHS

Cable Management 1U 19-inch D Ring

D RING



P/N : PNL-MANAGER-1U-RING

DATASHEET




CE RoHS

Rack Mount 19" Cable Manager Series

UNSHIELDED

UNLOADED




- Available in 1U / 2U
- Single side / Double side
- Standard capacity / High capacity

1U




2U

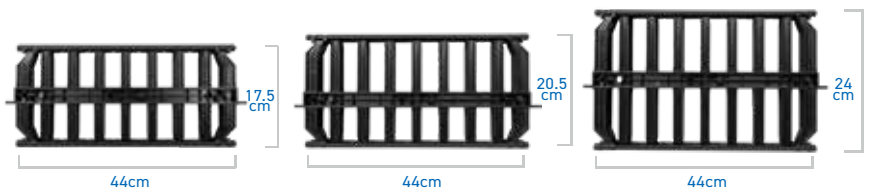

Standard

Capacity

High

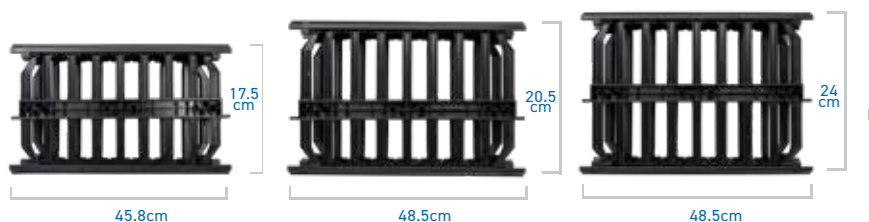

Optional : Single side / Double side

DATASHEET

