


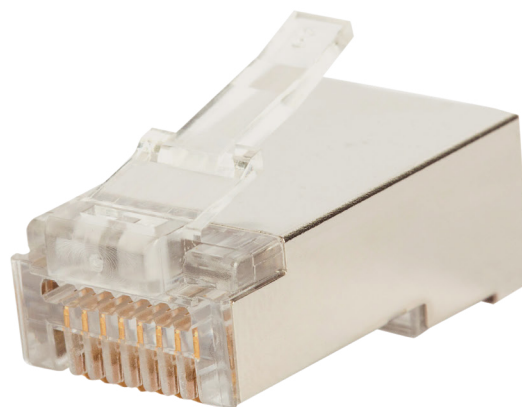

Internal Ground

Cat5e STP

Pass Through RJ45 Modular Plug

DATASHEET




Features

- Time saving feed through design
- Meets or Exceeds ANSI/TIA568-D.2
- ISO/IEC 11801 Class D ; ANSI/TIA 1096-A ; IEC 60603-7
- Supports POE &POH
- Insertion/Extraction Life : 2000 Minimum Cycles

STRAIGHT LINE

Max LAN Cable OD
6.5 mm

CONDUCTOR ID
0.95 - 1.05 mm

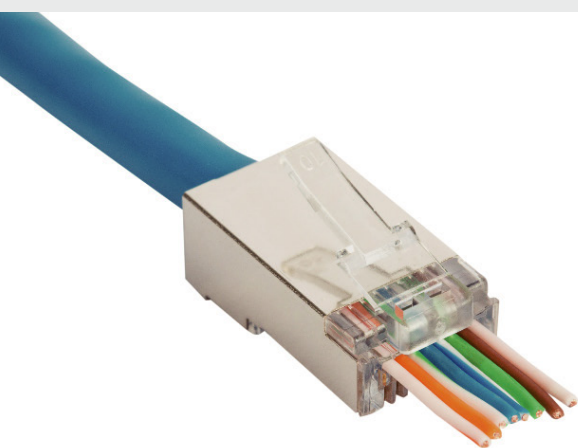 **24**
AWG **SOLID OR STRANDED**
 **Shielded**


Construction & Material

Plug Material : Polycarbonate, UL94V-2 (Optional : UL94V-0)
 Contact Pin Type : 3-Prong Pins
 Contact Material : Phosphor Bronze - .012" thick
 Contact Plating : 50μ micron thick 24ct Cold plated over 100μ of nickel plating

Electrical & Safety

Contact Resistance : 20 Milli-Ohms Max
 Current / Voltage : 30 VAC / 42 VDC at 1.5 Amps
 Operating Temperature : -40°C to +70°C
 Fire Safety : UL 94V-2

  RoHS 
 **FLUKE** device Tested

Packaging Available : 100pc / 500pc / 1,000pc / Custom

C-p6