



Internal Ground

# Cat6A STP

## Pass Through RJ45 Modular Plug



### Features

- Time saving feed through design
- Meets or Exceeds ANSI/TIA568-D.2
- ISO/IEC 11801 Class D ; ANSI/TIA 1096-A ; IEC 60603-7
- Supports POE &POH
- Insertion/Extraction Life : 2000 Minimum Cycles




Max LAN Cable OD  
7.0 mm

CONDUCTOR ID  
MAX 1.2 mm

23 AWG SOLID OR STRANDED

Shielded

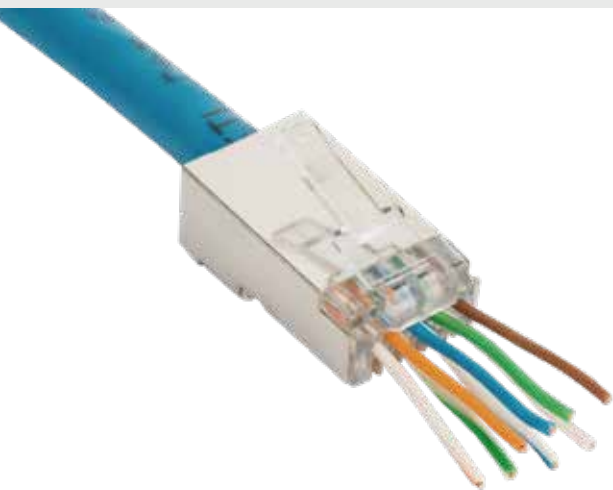

### Construction & Material

Plug Material : Polycarbonate, UL94V-2 (Optional : UL94V-0)  
Contact Pin Type : 3-Prong Pins  
Contact Material : Phosphor Bronze - .012" thick  
Contact Plating : 50µ micron thick 24ct Cold plated over 100µ of nickel plating

### Electrical & Safety

Contact Resistance : 20 Milli-Ohms Max  
Current / Voltage : 30 VAC / 42 VDC at 1.5 Amps  
Operating Temperature : -40°C to +70°C  
Fire Safety : UL 94V-2



Packaging Available : 100pc / 500pc / 1,000pc / Custom

C-p8