




Cat6 UTP

Pass Through RJ45 Modular Plug

DATASHEET

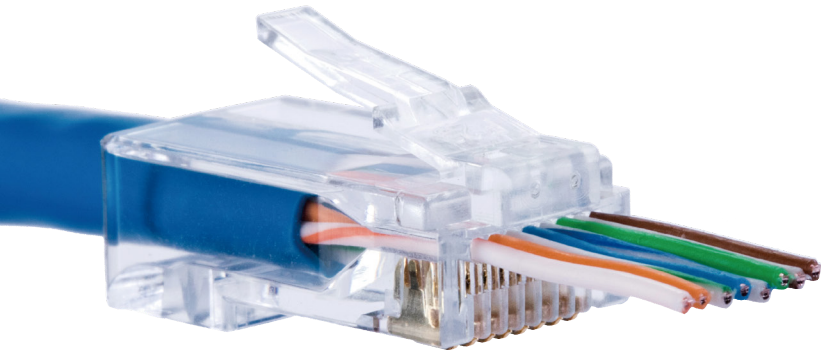

Features

- Time saving feed through design
- Meets or Exceeds ANSI/TIA568-D.2
- ISO/IEC 11801 Class D ; ANSI/TIA 1096-A ; IEC 60603-7
- Supports POE &POH
- Insertion/Extraction Life : 2000 Minimum Cycles


STRAIGHT LINE
Max LAN Cable OD
7.0 mm**CONDUCTOR ID**
0.95 - 1.05 mm **23**
AWG **SOLID OR STRANDED** **Unshielded**

Construction & Material

Plug Material : Polycarbonate, UL94V-2 (Optional : UL94V-0)
Contact Pin Type : 3-Prong Pins
Contact Material : Phosphor Bronze - .012" thick
Contact Plating : 50μ micron thick 24ct Cold plated over 100μ of nickel plating

Electrical & Safety

Contact Resistance : 20 Milli-Ohms Max
Current / Voltage : 30 VAC / 42 VDC at 1.5 Amps
Operating Temperature : -40°C to +70°C
Fire Safety : UL 94V-2

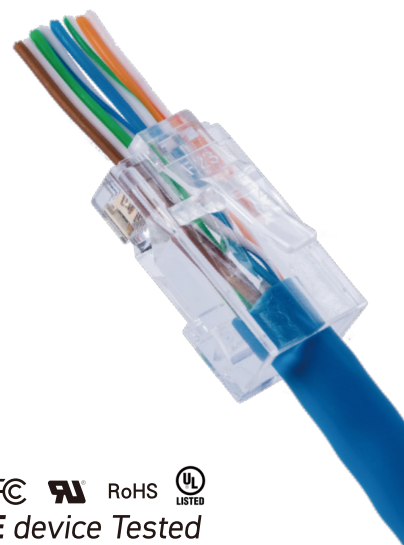 **FLUKE** device Tested   RoHS  LISTED

Packaging Available : 100pc / 500pc / 1,000pc / Custom

C-p4