



DL-2668/2668R PROFESSIONAL MODULAR CUTS-STRIPS-CRIMPS TOOL

DATASHEET



Specification :

Item No :

- DL-2668
(8P8C/RJ45,6P6C/RJ-12,6P4C/RJ-11, 6P2C)
 - DL-2668R
(8P8C/RJ45,6P6C/RJ-12,6P4C/RJ-11, 6P2C)
- WITH RATCHET
- * Length: 8"(203+/-3mm)
 - * Material: Carbon Steel
 - * Weight: 370g
 - * Hardness: HRC 42-48

**Finished : Black oxide finished.
PATED**





DL-3468/3468R/3460/3460R PROFESSIONAL MODULAR CUTS-STRIPS-CRIMPS TOOL

DATASHEET



Specification:

Item No:

- DL-3468
8P8C/RJ45,6P6C/RJ-12,6P4C/RJ-11,6P2C
4P4C,4P2C,DEC/OFF SET PLUG 6P6C
- DL-3468R
8P8C/RJ45,6P6C/RJ-12,6P4C/RJ-11,6P2C
4P4C,4P2C, DEC/OFF SET PLUG 6P6C
With Ratchet
- DL-3460
10P10C,AMP8P8C/RJ45,6P6C/RJ-12,
6P4C/RJ-11,6P2C,4P4C,4P2C,
DEC/OFF SET PLUG 6P6C
- DL-3460R
10P10C,AMP8P8C/RJ45,6P6C/RJ-12,
6P4C/RJ-11,6P2C,4P4C,4P2C,
DEC/OFF SET PLUG 6P6C With Ratchet
- * Length: 7.8" (200+/-3mm)
- * Material: Carbon Steel
- * Weight: 400g
- * Hardness: HRC 42-48

**Finished: Black oxide finished.
PAT.P**



DL-5468R

Modular Crimping Tool

for RJ11/12 & RJ45

DATASHEET



Specification :

Function :

- Modular crimping tool for 8P8C/RJ-45, 6P6C/RJ-12, 6P4C/RJ-11, 4P4C & 4P2C
- With Ratchet Mechanism.
- Built-in round cable stripper and cutter.

Material :

- Cover plate and handle : Carbon steel
- Grip : PVC Handle

Hardness :

- Cover plate and handle : HR30N 55-70

Finish :

- Body : Black Oxide

Overall Length :

- 203 +/- 3mm

Weight :

- 350 +/- 10g





DL-5204/5206/5208/5212 Coaxial Cable Stripper

DATASHEET



Specification :

Item No:	Stripper Dimension		Stripper Distance
DL-5204	4mm		 2 Blades Model RG-58/59/62/6,3C/4C/5C Φ4.9~Φ8.0
DL-5206	6mm		
DL-5208	8mm		
DL-5212	12mm		
DL-5274	6mm		RG-174(Φ2.6mm)
DL-5812	12mm		RG-11(Φ10.5mm)
	Stripper Dimension "C" "D"		Stripper Distance
	C (mm)	C (mm)	 3 Blades Model RG-58/59/62/6,3C/4C/5C Φ4.9~Φ8.0
DL-5348	4	8	
DL-5366	6	6	
DL-5384	8	4	
DL-5374	4	8	RG-174(Φ2.6mm)

Length :
- 3.5" (90+/-3mm)

Material :
- BODY MADE OF ABS PLASTIC.
- BLADES MADE OF SK-5

DL-501 Cable Cutter



DATASHEET



Specification:

Item No :
DL-501

Function :

Curve Blade Cuts Wire
up To $\Phi 0.41"$ ($\Phi 10.5\text{mm}$)

Length :

- 6.7" (170+/-3mm)

Material :

- 3.2mm Middle Carbon Steel

Weight :

- 180g

Finished :

- Black Oxide Finished.

- Do Not Cut Steel.





JS91A00 series Torque Wrench

7/16" Open End

DATASHEET



Specification :

Function :

Use to torque 7/16" F-fittings. Torque (in inch pounds) is preset.

P/N	Torque	Finish	Grip
JS91A11	10 in-lbs	Black Oxide	Yellow
JS91A21	20 in-lbs	Black Oxide	Yellow
JS91A31	30 in-lbs	Black Oxide	Yellow
JS91A41	40 in-lbs	Black Oxide	Yellow

Material :

- Metal Components Steel
- Grip : PVC Dipping

Overall Length :

- JS91A00 series : 172 +/- 5mm

Weight :

- JS91A00 series : 179 +/- 10g



JS21A00

Coaxial Cable Stripper

For RG59/6 & RG7/11



With adjusting nut, stripper is preset for RG59/6, turn the nut 1/2 for RG7/11.



Specification :

Function :

Coaxial Cable stripper for RG59/6 & RG7/11, with 7/16" wrench for F connector on the end of the tool.

Material :

- Body : ABS and TPR

Overall Length :

- 130mm +/- 3mm

Weight :

- 42 +/- 5g

DL-501B

Universal Cable Stripper

For COAX. CABLE and UTP/STP Cable

DATASHEET



Specification :

Function :

- Cable stripper for COAX cable and UTP/STP round and flat cable. With cable cutter.

Material :

- BODY MADE OF NYLON PLASTIC.
- BLADES MADE OF SK-5 & ARE REPLACEABLE

Overall Length :

- +/- 3mm

Weight :

- +/- 10g





JD-701 Series Automatic Wire Stripper

DATASHEET



Specification :

701A	AWG	Stranded	26	20	16	14		
		Single	24	18	14	12		
	mm		0.5	1.0	1.6	2.0		
	Show on tool		0.5	1.2	1.6	2.0		
701B	AWG	Stranded	20	16	14	12	10	
		Single	18	14	12	10	8	
	mm		1.0	1.6	2.0	2.6	3.2	
	Show on tool		1.0	1.6	2.0	2.6	3.2	
701E	AWG	Stranded	24	20	16	14	12	10
		Single	22	18	14	12	10	8
	mm		0.5	1.0	1.6	2.0	2.6	3.2
	Show on tool		22	18	14	12	10	8
701F	AWG	Stranded	16-14	12	10	8		
		Single	14-12	10	8	6		
	mm²		1.25-2.0	3.5	5.5	8		
	Show on tool		1.25-2.0	3.5	5.5	8		

Material :

- Blade : SPCC, Hardness : HV500~800
- Body : Alloy Zinc Steel
- Grip : TPR

Finish :

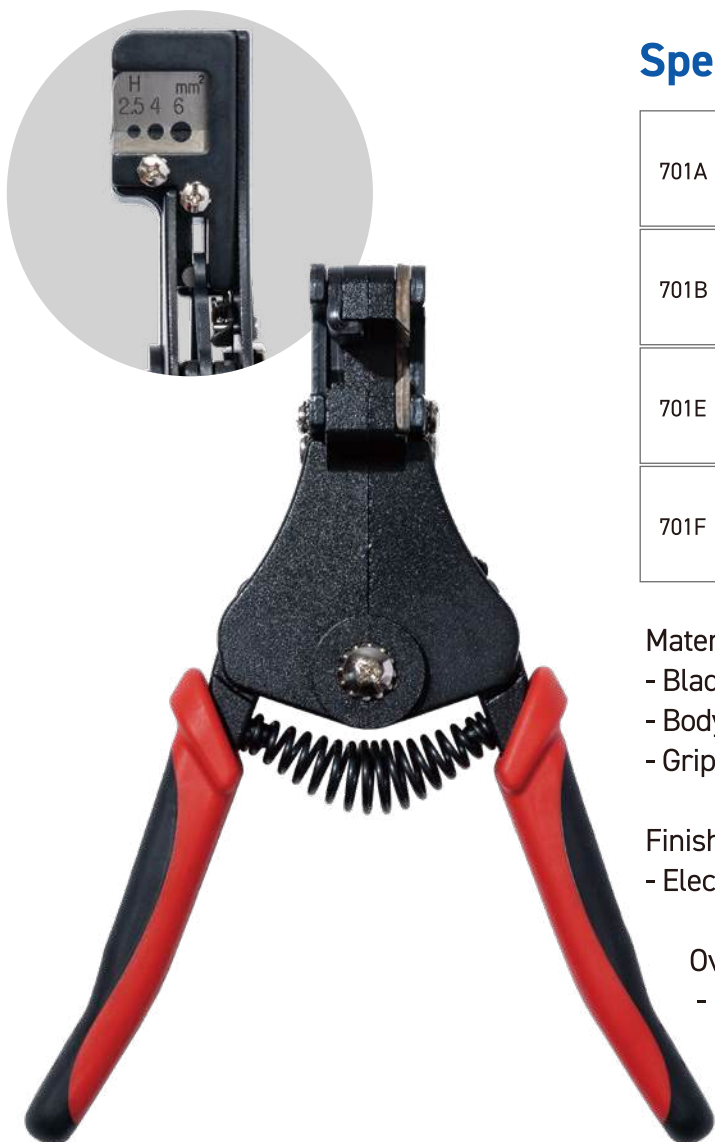
- Electro Depositing Coating

Overall Length :

- 170 mm +/- 5mm

Weight :

- 368 +/- 10g



JS92A00 Fiber Connector Tool

DATASHEET



Specification :

Function :

Fiber Connector Insertion & Extraction Tool for LC & SC Connectors.

Include spring & soft grip handle for maximum easy control and non-slip.

Work with LC & SC simplex and duplex connector, MU, MT-RJ and other similar connector.

Rubber coated jaws secure and grip connectors without damaging them.

Material :

- Body : 3.0mm SPCC
- Blade : Powder Injection Molding
- Grip : ABS

Finish :

- Black Oxide

Overall Length :

- 260mm +/- 3mm

Weight :

- 75g +/-15g





JS11A00

Modular Crimping Tool

for RJ11/12 & RJ45

DATASHEET



Specification :

Function :

- Modular crimping tool for RJ11/12 & RJ45.
- Built-in round cable stripper and cutter.

Material :

- Body : ABS-Plastic
- Cover plate and handle : Middle Carbon steel
- Grip : PP and TPR Handle

Hardness :

- Cover plate and handle :
HRC 38~46

Finish :

- Cover plate and handle :
Black Oxide

Overall Length :

- 200mm +/- 3mm

Weight :

- 325 +/- 10g



JS23F00 Fiber Stripper



DATASHEET



Specification :

Function :

- Strip Outer Jacket Insulation
- Strip 250µm Buffer Coating
- Strip 125µm Glass Fiber

Material :

- Body : 3.2mm Middle Carbon steel
- Grip : PVC

Hardness:

- HRC52+/-3

Finish :

- Black Oxide

Overall Length :

- 150mm +/- 3mm

Weight :

- 110 +/-10g



JS23G01 Fiber Stripper



DATASHEET



Specification :

Function :

- Strip Outer Jacket Insulation
- Strip 250µm Buffer Coating
- Strip 125µm Glass Fiber

Material :

- Body : 3.2mm Middle Carbon steel
- Grip : TPR Handle

Hardness :

- HRC52+/-3

Finish :

- Black Oxide

Overall Length :

- 150mm +/- 3mm

Weight :

- 110 +/-10g



JS23H00 Fiber Stripper

DATASHEET



Specification :

Function :
Strip 125µm Glass Fiber

Material :
- Body : 3.2mm Middle Carbon steel
- Grip: PVC

Hardness :
- HRC52+/-3

Finish :
- Black Oxide

Overall Length :
- 133mm +/- 3mm

Weight :
- 80 +/-10g

